


**Monomando Innovex Redondo Para
Regadera y/o Tina**

*Innovex Round Tub and /or Shower
Single Control*

Mod. E-55-A1

No.	Clasif.	Descripción	No.	Clasif.	Description
1	Rv-815	Cuerpo Monom. Balanceo de Presión	1	Rv-815	Pressure Balance Single Control Body
2	Sv-259	Valvula de Control	2	Sv-259	Control Valve
3	Rv-792	O'ring 2-030	3	Rv-792	2-030 O'ring
4	Rb-651	Portacartucho	4	Rb-651	Cartridge Holder
5	Rh-614	O'ring 2-124	5	Rh-614	2-124 O'ring
6	Sv-365	Cartucho Monomando Regadera E-40	6	Sv-365	E-40 Single Lever Shower Cartridge
7	Rb-652	Tuerca de 1-5/8"-24 Uns	7	Rb-652	1-5/8"-24 Uns Nut
8	Rb-653	Chapetón de 1-5/8"-24 Uns	8	Rb-653	1-5/8"-24 Uns Plate
9	Rv-1015	Empaque Redondo para Monom. Ac. Inox.	9	Rv-1015	Round Packing for Stainless Steel Single Control
10	Rv-1009	Chapetón Redondo Ac. Inox	10	Rv-1009	Stainless Steel Round Plate
11	Rb-655	Tornillo 2-3/4" Cabeza Plana	11	Rb-655	2-3/4" Flathead Screw
12	Rb-654	Maneral Monomando Balanceo Ac. Inx.	12	Rb-654	Round Line Handle for Single Control Shower
13	Rb-563	Opresor Allen M5 X 0.8 Mm.	13	Rb-563	M5 X 0.8 Mm. Allen Setscrew
14	Rb-623	Llave Allen	14	Rb-623	Allen Wrench
15	Rv-641	Tapón	15	Rv-641	Cap

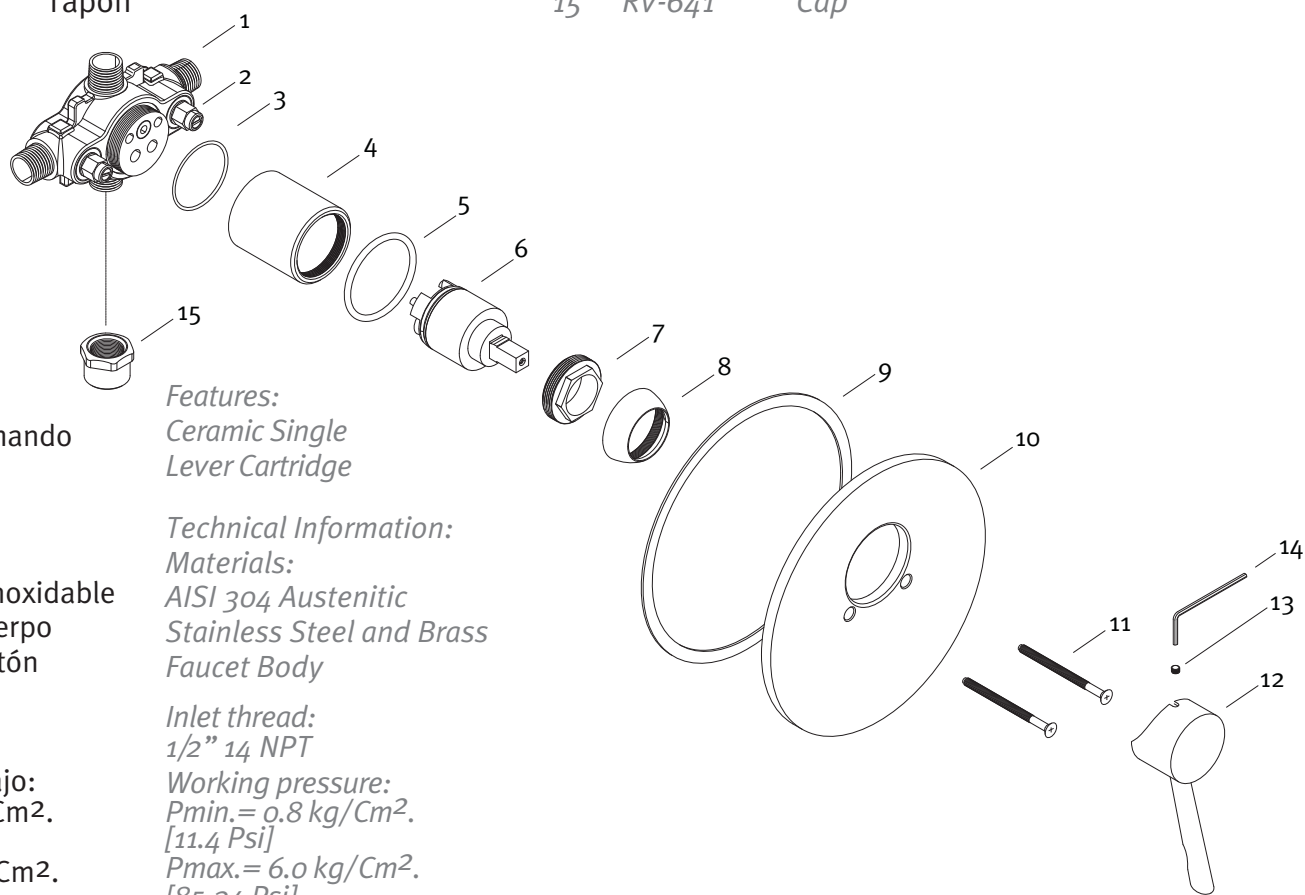

Características:
Cartucho Monomando
Cerámico

Features:
Ceramic Single
Lever Cartridge

Datos Técnicos:
Material:
AISI 304 Acero Inoxidable
Austenítico y Cuerpo
Mezclador de Latón

Technical Information:
Materials:
AISI 304 Austenitic
Stainless Steel and Brass
Faucet Body

Conexión:
1/2" 14 NPT
Presión de Trabajo:
Pmin.= 0.8 Kg/ Cm².
[11.4 Psi]
Pmax.= 6.0 Kg/ Cm².
[85.34 Psi]

Inlet thread:
1/2" 14 NPT
Working pressure:
Pmin.= 0.8 kg/Cm².
[11.4 Psi]
Pmax.= 6.0 kg/Cm².
[85.34 Psi]

**Ajuste de
Instalación:**
12.7 mm [0.5"] Máx
Precaución:
No Retirar la Cubierta
Hasta Haber Colocado el
Acabado Final del Muro

*Shower valve
Installation depth range:*
12.7 mm [0.5"] max
Caution:
Do not remove the cover
before setting the final
finish on the wall