


Brazo y Regadera Innovex Redonda
De Chorro fijo

Round Innovex Fixed Stream Shower
with Arm and Escutcheon

Mod. H-903-Al

No.	Clasif.	Descripción	No.	Clasif.	Description
1	Rb-674	Chapetón Regadera Redonda	1	Rb-674	Round Shower Escutcheon
2	Rb-679	O'ring 2-211	2	Rb-679	2-211 O'ring
3	Rb-673	Brazo Regadera Redonda	3	Rb-673	Round Shower Arm
4	Sr-080	Economizador para Regaderas	4	Sr-080	Shower Economizer
5	Rb-672	Contra Tuerca	5	Rb-672	Jam Nut
6	Rb-661	Seguro para Nudo Regadera	6	Rb-661	Shower Coupling Lock
7	Rb-671	Nudo para Regadera Línea Redonda	7	Rb-671	Round Shower Coupling
8	Rb-663	Sello para Nudo Línea Redonda	8	Rb-663	Round Coupling Seal
9	Rb-678	Rondana para Nudo Regadera Redonda	9	Rb-678	Round Shower Coupling Washer
10	Rb-680	Resorte para Regadera Redonda	10	Rb-680	Round Shower Spring
11	Rb-670	Tapa Superior Regadera Redonda	11	Rb-670	Round Shower Upper Cover
12	Rb-669	Empaque Sello para Regadera Redonda	12	Rb-669	Round Shower Seal
13	Rr-338	Anticalcario Individual	13	Rr-338	Individual Anti-lime
14	Rb-684	Plato de Regadera Redonda	14	Rb-684	Round Shower Plate
15	Rb-659	O'ring 2-008	15	Rb-659	2-008 O'ring
16	Rb-656	Tornillo 10-32 para Plato Regadera	16	Rb-656	10-32 Screw for Shower Plate

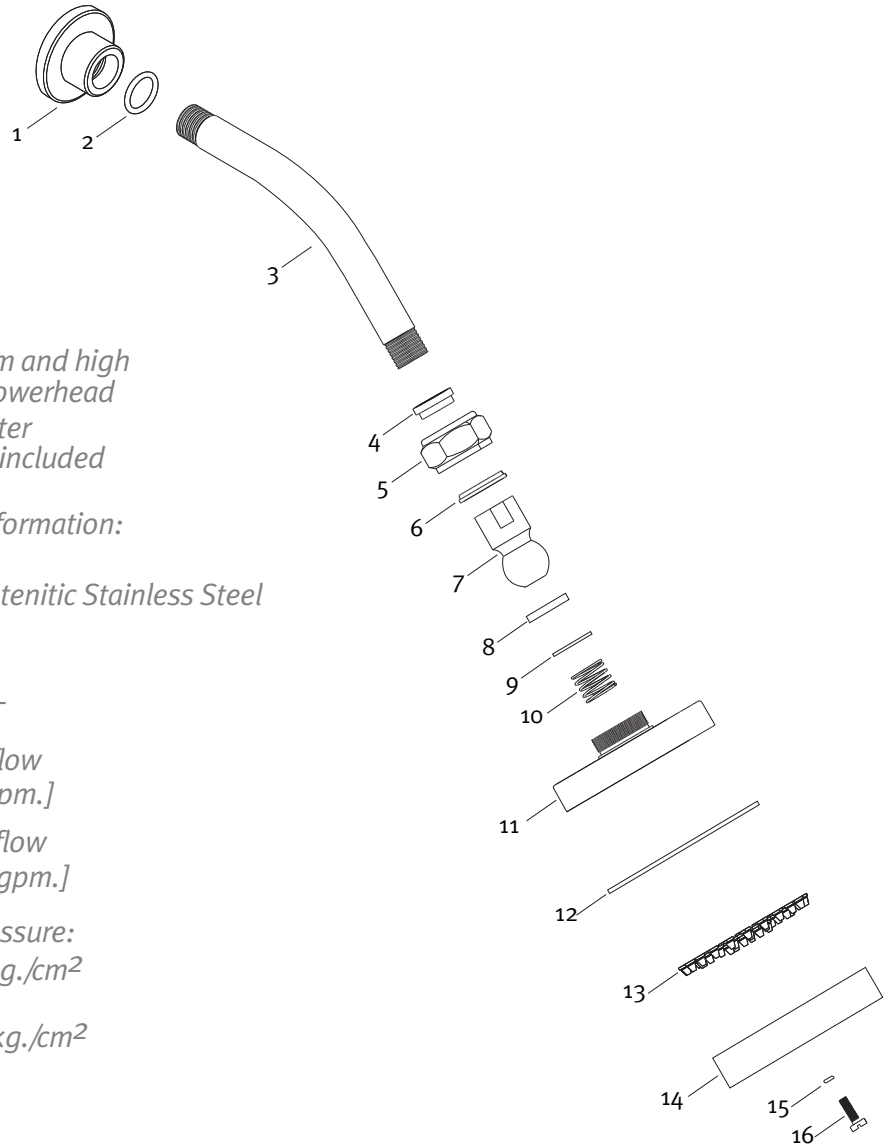

Características:
Regadera de baja, media
Y alta presión
Economizador dinámico
de agua incluido

Features:
Low, medium and high
Pressure showerhead
Dynamic water
Economizer included

Datos Técnicos:
Material:
AISI 304 Acero Inoxidable
Austenítico

Technical information:
Materials:
Aisi 304 Austenitic Stainless Steel

Conexión:
1/2" - 14 NPT

Fitting:
1/2" - 14 NPT

Gasto mínimo:
4 l/m [1.05 gpm.]

Min. Water flow
4 l/m [1.05 gpm.]

Gasto máximo:
10 l/m [2.64 gpm.]

Max. Water flow
10 l/m [2.64 gpm.]

Presión de trabajo:
Pmin.=0.2 kg./cm²
[2.85 Psi.]
Pmax.=6.0 kg./cm²
[85.34 Psi.]

Working pressure:
Pmin.=0.2 kg./cm²
[2.85 psi.]
Pmax.=6.0 kg./cm²
[85.34 psi.]